


EASY INSTALLATION

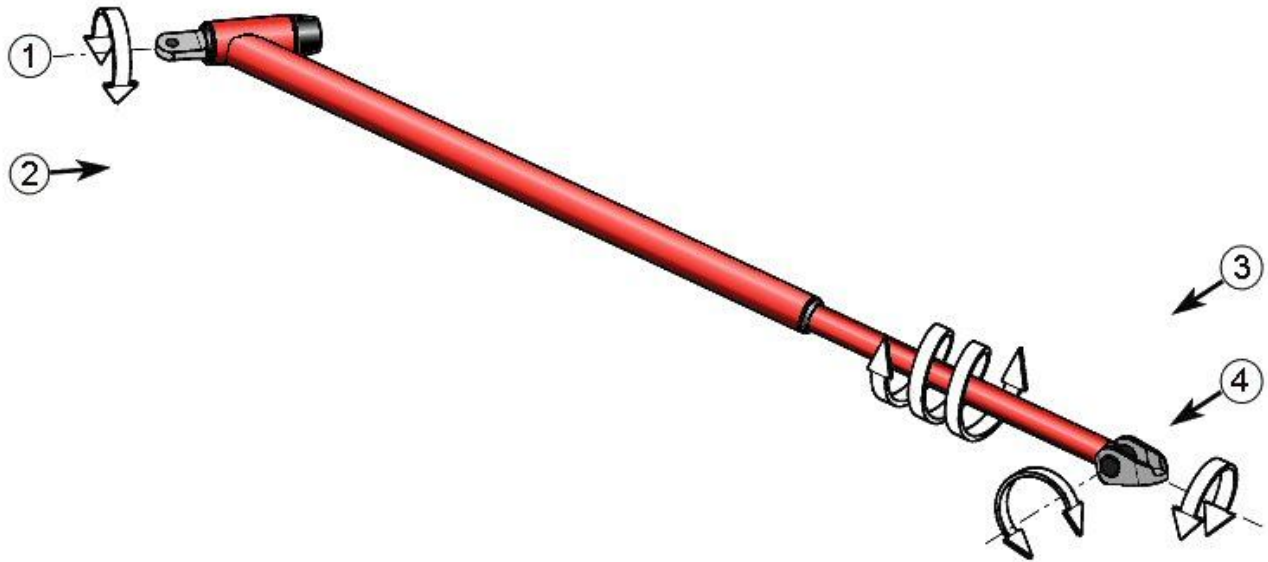

- A. FINGER-TIGHTEN TOPSTAY TO BOAT HULL.
- B. HOLD OUTER TUBE (2) STEADY WHILE TURNING INNER TUBE (3) IN OR OUT TO ADJUST LENGTH.
- C. TIGHTEN TOPSTAY TO OARLOCK PIN.
- D. FINISH TIGHTENING TOPSTAY TO BOAT HULL.

Legend: 1. Pin Connector 2. Outer Tube 3. Inner Tube 4. Hull Connector